

MineralAktiv Scheibenputz Dry floated render

Hybrid floated render with optimized moisture management

Product Data Sheet

2026-04



Product description

Mineral finishing render for subtle floated render, scratch render or grain-on-grain texture on a hybrid binder basis. With optimized moisture management for quickly diverting rainwater away from the surface. Fast absorption of moisture with surface condensation and fast redrying of absorbed moisture. The combination of natural alkaline formulation and optimized moisture management provides a preventative effect against algae and mould.

Composition

Mineral hybrid binder, graded quartz and limestone grains, water-retaining and water-repellent additives, and lightfast and alkaline resistant colour pigments, if required

Storage

Store the bags on wooden pallets in a dry environment. The product can be stored for at least 12 months. Re-bag damaged bags and use first.

Quality

In compliance with EN 998-1, the product is subject to initial type testing and continuous factory production control and bears the CE marking. Furthermore, the product is subject to external monitoring as a final layer in WARM WALL systems.

Properties and added value

- Coloured rendering mortar CR acc. to EN 998-1
- Compressive strength category CS II acc. to EN 998-1
- Biocide-free
- For interior and exterior application
- Driving-rain protection resistance class III acc. to DIN 4108
- Application in the plinth area
- For machine or hand application
- Grain size 2.0 mm, 3.0 mm and 5.0 mm
- White (approx. RAL 9016)
- Can be coloured subject to limitations in colour shades for mineral-based finishing coats compliant to the Knauf ColorConcept colour-shade selector card

Field of application

As a mineral finishing coat:

- On Knauf WARM WALL systems
- On lime, lime-cement and cementitious basecoats or reinforcement plaster
- On gypsum plasters/renders
- On gypsum boards and plaster block

Application

Substrate and pretreatment

Substrate	Pretreatment
Lime, lime-cement and cementitious basecoats	Use Isogrund if required
Reinforcement render	Use Isogrund if required
Restoration plasters/renders	None
Gypsum and gypsum lime renders	Prime with Quarzgrund Pro/ Raumklima Grundierung ¹⁾
Smooth concrete, prefabricated concrete units	Prime with Quarzgrund Pro/ Raumklima Grundierung ¹⁾
Gypsum boards	Remove the dust and treat the sanded surfaces with Grundol if necessary. Pretreatment with Aton Sperrgrund barrier coating.
Plaster blocks	With absorbent substrates, apply a primer coat of Grundol and a coat of Quarzgrund Pro / Raumklima Grundierung primer ¹⁾

Allow primer coats to dry for at least 12 hours before continuing work.

1) Drying time until subsequent application of Quarzgrund Pro/Raumklima Grundierung primer approx. 2 hours.

Preparation

Check substrate for compliance with VOB part C, DIN 18350, DIN 18345 chapter 3.1 and/or according to VOB part B, DIN 1961 paragraph 4 no. 3. Clean the substrate of dust and remove loose parts, ensure that the surface is smooth. Cover easily-soiled building components before commencement in accordance with Code of Practice "Abklebe- und Abdeckerarbeiten für Maler- und Stuckateurarbeiten - Masking and covering for painting and stucco work" (German only) issued by the Bundesverband Ausbau und Fassade. Protect weather-exposed surfaces from precipitation and direct sunlight.

All substrates must be stable, dry, even and free of grease and dust as well as free of any residual substances that may reduce the adhesion.

Machines / equipment

PFT mixing pump G 4

- Stator D4-3
- Rotor D4-3
- Mortar hoses Ø 25 mm
- Wet mortar pumping distance up to 30 m

Mixing

Mixing by hand

Mix the content of one bag with about 7.2 litres of clean water until an application-ready lump-free consistence is achieved.

Mixing by machine

For machine application using mixing pumps, e.g. PFT G 4, set the desired consistence by adding water. Prelubricate the hoses with wallpaper paste and fill them successively.

Application

Apply mortar in grain thickness to the full surface with a suitable stainless steel tool. In case of application by machine, spray on a thin layer of material and rule with a suitable stainless steel tool. Texture uniformly or model using a PVC trowel, foam rubber disc or polystyrene disc float.

Work fresh-in-fresh, do not re-smoothen surfaces already smoothened. Always complete visually unified surfaces in one working step on the same day. Do not use a range of different tools to avoid differences in the colour and textural effects. Work simultaneously at all scaffolding levels with offset scaffolding levels.

Reinforcement

To minimize the occurrence of plaster cracking with lightweight plasters in exteriors, a reinforcement plaster with full-surface mesh insert on the basecoat is recommended. For exterior plaster surfaces where the plaster system is exposed to increased stress, e.g. particular exposure of the façade, use of freely textured, brushed or sponged finishing plasters, finishing plasters < 2 mm grain size (acc. to DIN 18350, VOB Part C, < 3 mm), luminosity < 20, a reinforcing plaster with full-surface mesh insert on the basecoat is generally recommended. Refer to the "Leitlinie für das Verputzen von Mauerwerk und Beton - Guidelines for plastering masonry and concrete" issued by the VDPM e. V. (German only). The exceptions to this case are Gigamit and Sockel Gigamit with a full surface mesh insert.

Plinth application

The render system must be protected against the ingress of moisture at the connection to the lower edge. The required plaster sealing or the necessary moisture protection must be applied up to at least 5 cm above the edge of the ground line or top edge of the covering. In the lower edge, this is recommended for application up to the existing building sealing. As a plaster seal / moisture protection, apply Sockel-Dicht in a layer thickness of at least 1.2 mm (dry layer thickness min. 1 mm). When sufficiently dry, apply a protective layer against damage (e.g. fleece laminated dimpled sheet and slip membrane).

Health-relevant requirements

Always wear waterproof, robust gloves, long work clothes and safety goggles when working with MineralAktiv Scheibenputz Dry floated render.

If the MineralAktiv Scheibenputz Dry floated render comes into contact with the eyes, they must be washed out immediately with clean, clear water and an eye specialist consulted immediately! Avoid prolonged skin contact with the product and, if this occurs, clean the affected areas immediately and thoroughly with clean water!

The longer the fresh product remains on your skin, the greater the risk of serious skin damage. Keep children away from fresh material and always follow the health and safety instructions during application.

Application temperature/climate

Do not apply with air, component and/or substrate temperatures below +5 °C and ensure that the temperature does not fall below this temperature until the plaster has hardened sufficiently. Furthermore, the temperature should not exceed +30 °C during application.

In order to prevent rapid dehumidification of the fresh render by the exposure to direct sunshine (high surface temperatures), and/or strong wind (danger of cracks, reduction in strength) suitable protection measures / treatment (e.g. protective nets, keeping moist) are required.

Cleaning

Clean the equipment and tools with water immediately after use.

Notes

Renders must be applied according to EN 13914, DIN 18550, DIN 55699, DIN 18345 and DIN 18350 well as the generally recognized building engineering rules and valid guidelines.

The mineral finishing render offers some protection against algal and fungal growth and has an inhibiting effect due to its natural alkaline formulation. No guarantee can, however, be given for long-term protection against algal and fungal growth. The susceptibility depends on the local and environmental conditions.

Heating in rooms should only be put into operation in stages. Rapid dehumidification, e.g. using dehumidifiers should be avoided.

Coatings and linings

Paints

Finishing renders must be fully hardened and dry before paint coats are applied.

In exteriors after a drying time of at least 7 days with white and pigmented surfaces, it is necessary to apply an additional coat of MineralAktiv Fassadenfarbe façade paint in the colour shade of the render. On white surfaces that will have a different colour applied, apply a double coat (undercoat and top coat) of MineralAktiv Fassadenfarbe façade paint.

In interiors, white finishing coats can be painted and pigmented finishing coats should be painted using Knauf interiors paints.


Notes

When mineral finishing plasters are applied, it is possible that a uniform colour hue may not be achieved or a difference in the degree of gloss may occur on the plaster surface due to processing, consistence, weather-related or drying condition factors.

These features, however, in no way impair quality and shall not provide any justification for claims in respect of the material as they stem from uncontrollable physical conditions at the site and they can be equalized by application of a coating.

A 100% colour uniformity between the finishing render and the coating as well as on the Knauf colour shade selector card cannot be guaranteed. The colour effect is influenced by lighting effects on the surface, exposure to weather and drying conditions. We recommend that you create some test areas to determine the exact colour effect.

Alkalinity effectivity

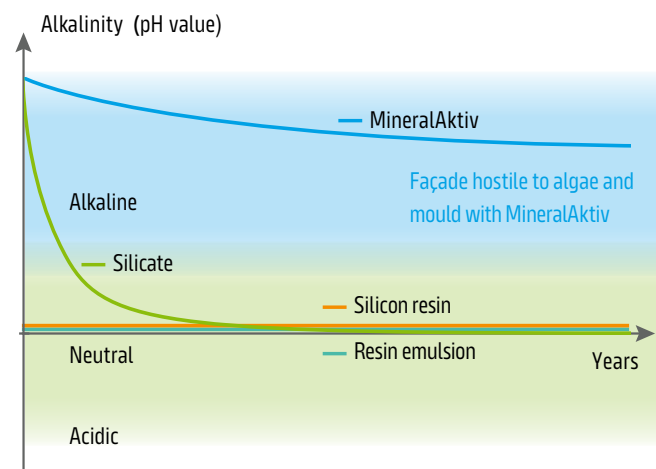

Technical data

Description	MineralAktiv Scheibenputz Dry	Unit	Standard
Reaction to fire	A1	Category	EN 13501-1
Grain size	2.0 / 3.0 / 5.0	mm	–
Compressive strength	CS II	Category	EN 1015-11
Water vapour diffusion resistance μ	≤ 20	–	EN 1015-19
Thermal conductivity $\lambda_{10, \text{dry mat}}$ at P = 50 % P = 90 %	≤ 0.82 ≤ 0.89	W/(m·K) W/(m·K)	EN 1745
Capillary water absorption	$W_c 1$	Category	EN 1015-18
Maximum water absorption	650	g/m ²	–
Drying for 18 h at +20 °C, 65 % relative humidity	450	g/m ²	–

The stated technical data were evaluated acc. to the respective test standards. Deviations under site conditions are possible.

Material requirement / efficiency

Grain size mm	Coat thickness mm	Consumption approx. kg/m ²	Yield approx. m ² /bag
2.0	2.0	2.4	10.4
3.0	3.0	3.4	7.4
5.0	5.0	5.0	5.0

The consumption values were determined under laboratory conditions. Additional consumption resulting from conditions in practice must be taken into account. The material consumption depends on the roughness, evenness and absorption properties of the substrate as well as the machinery used.

Product variants

Description	Application	Packaging unit	Material number	EAN
MineralAktiv Scheibenputz Dry 2,0	25 kg	42 bags/pallet	00741403	4003950140556
	25 kg pigmented		00741428	4003950140587
MineralAktiv Scheibenputz Dry 3,0	25 kg		00741429	4003950140617
	25 kg pigmented		00741430	4003950140648
MineralAktiv Scheibenputz Dry 5,0	25 kg		00869782	4003950147920
	25 kg pigmented		00869785	4003950147951

Sustainability and environment

Note

MineralAktiv Scheibenputz Dry is qualified as a part of the Sentinel Holding Institute (SHI) [Product pass](#) for finishing renders - exterior.



Videos for Knauf systems and products can be found under the following link:
youtube.com/knauf



Find the right system for your requirements!
knauf-ite.com/en/products-systems



All Knauf Gips documents are available in an up-to-date and clearly organised format in the [Download Center](#) at www.knauf-ite.com/en.

Knauf Gips KG

Am Bahnhof 7
97346 Iphofen
Germany

Knauf Direkt:

knauf-direkt@knauf.com

www.knauf-ite.com

Constructional, structural and characteristic building physics properties of Knauf systems can only be solely ensured with the exclusive use of Knauf system components, or other products expressly recommended by Knauf.

All technical changes reserved. Only the current issue is valid. The specified details correspond with our current state-of-the-art. The generally recognized building engineering rules, applicable standards, guidelines and craftsmanship rules must be observed by the installer in addition to the application specifications. Our warranty is expressly limited to our products in flawless condition. All application quantities and delivery amounts are based on empirical data that are not easily transferable to other deviating areas. All rights reserved. All amendments, reprints and photocopies, including those of excerpts, require our expressed written permission.